

द नेशनल एकेडमी ऑफ साइंसेज़ इन्डिया (नासी)

5 लाजपतराय रोड़, इलाहाबाद .211002

फोन न0 0532-2640224

(मम्फोर्डगंज टेलीफोन एक्सचेंज के पास)

बाओलिओं की मरम्मत के लिए निविदा


नासी, मध्य प्रदेश के जिला छतरपुर के तहसील राजनगर में पथर्गुआन, राजगढ़, अवधपुर, पीरा एवं टिकारी में स्थित पांच बाओलिओं की फेस लिफ्टिंग कार्य के लिए मोहर बन्द निविदायें आमंत्रित करती है। विस्तृत जानकारी जैसे साइट मैप के साथ काम करने का विवरण एवं ड्राइंग के लिए कृपया अकादमी की वेबसाइट www.nasi.org.in अथवा www.nasi.nic.in देखें। कृपया मौके/साइट पर जाएं और तदनुसार कार्य के लिए कोटेशन जमा करें। निविदायें मार्च 20, 2017 को सायं 3:30 बजे तक अकादमी कार्यालय में प्राप्त हो जानी चाहिए।

Plan

n and Elevation of step well at Patharguwan, Tahsil- Rajnagar, Dist- Chhatarpur, MP



Section A A' Step Well Elevation

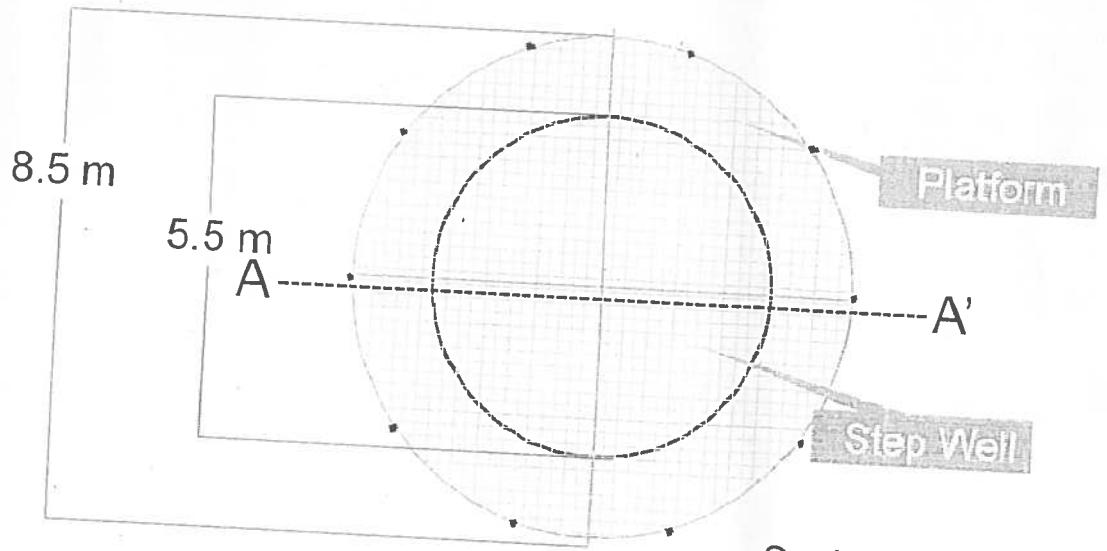

Step Well Plan

Scale - Not to be Scale


DETAILS ESTIMATE FOR PROVIDING AND FIXING OF WELDED STEEL WIRE
FABRIC FENCING SHED ON STEP WELL AT PATHARGUMA TEHSEEL RAJNAGAR
DIST. CHHATARPUR M.P.

Sr.No	Particular of item	QUANTITY	RATE	UNIT	AMOUNT
	Supplying at site Angle iron post & strut of required size including bottom to be split and bent at right angle in opposite direction for 10 cm length and drilling holes upto 10 mm dia. etc. complete. 22/7 $*8.7 = 37.34M$ $10*3.6 = 36.00M$ $2* 8.7 = 17.40M$ $80.74.05M$				
	Providing and fixing G.I. chain link fabric fencing of required width in mesh size 25x25 mm made of G.I. wire of dia. 3mm including strengthening with 3mm dia. wire or nuts, bolts and washers as required complete as per the direction of Engineer-incharge. $1*22/7*4 *(8.7)2 =59.47$				
				TOTAL	
	ADD 3% FOR CONTENGENCIES CHARGES				
				G TOTAL	

Plan and Elevation of step well at Rajgarh, Tahsil- Rajnagar, Dist- Chhatarpur, MP



Section A A' Step Well Elevation

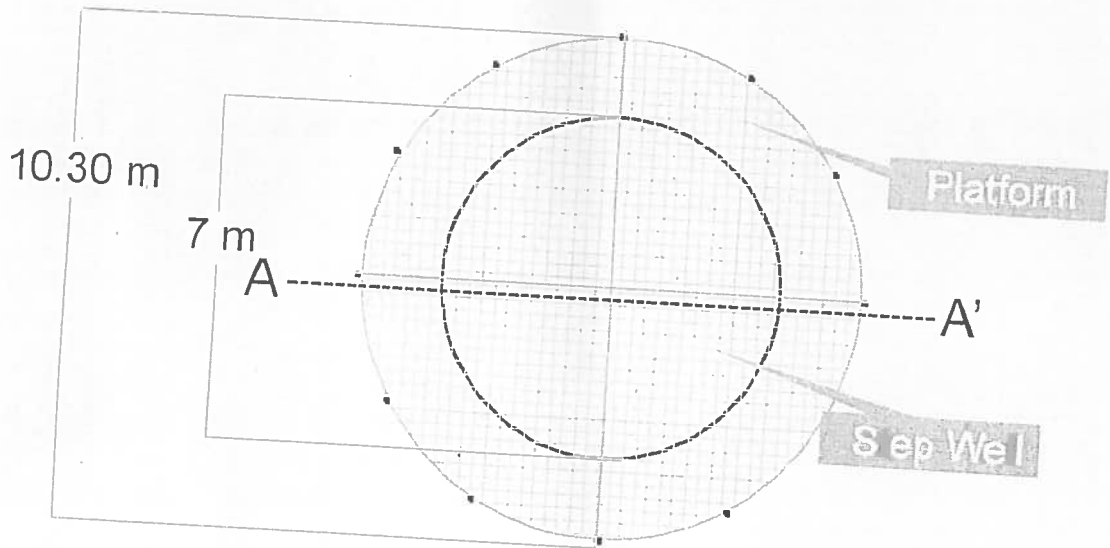

Scale - Not to be Scale


Step Well Plan

DETAILS ESTIMATE FOR PROVIDING AND FIXING OF WELDED STEEL WIRE
FABRIC FENCING SHED ON STEP WELL AT RAJGADH TEHSEEL RAJNAGAR
DIST. CHHATARPUR M.P.


Sr.No	Particular of item	QUANTITY	RATE	UNIT	AMOUNT
	<p>Supplying at site Angle iron post & strut of required size including bottom to be split and bent at right angle in opposite direction for 10 cm length and drilling holes upto 10 mm dia. etc. complete.</p> <p>22/7 *10.5 = 32.99M 12*3.6 = 41.20M 2* 10.5= <u>21.00M</u> 97.19M</p>				
	<p>Providing and fixing G.I. chain link fabric fencing of required width in mesh size 25x25 mm made of G.I. wire of dia. 3mm including strengthening with 3mm dia. wire or nuts, bolts and washers as required complete as per the direction of Engineer-incharge.</p> <p>1*22/7*4 *(10.5)2 =86.625 SQM</p>				
				TOTAL	
	ADD 3% FOR CONTEGENCIES CHARGES				
				G TOTAL	

2B

Plan and Elevation of step well at Awadhapura, Tahsil- Rajnagar, Dist- Chhatarpur, MP

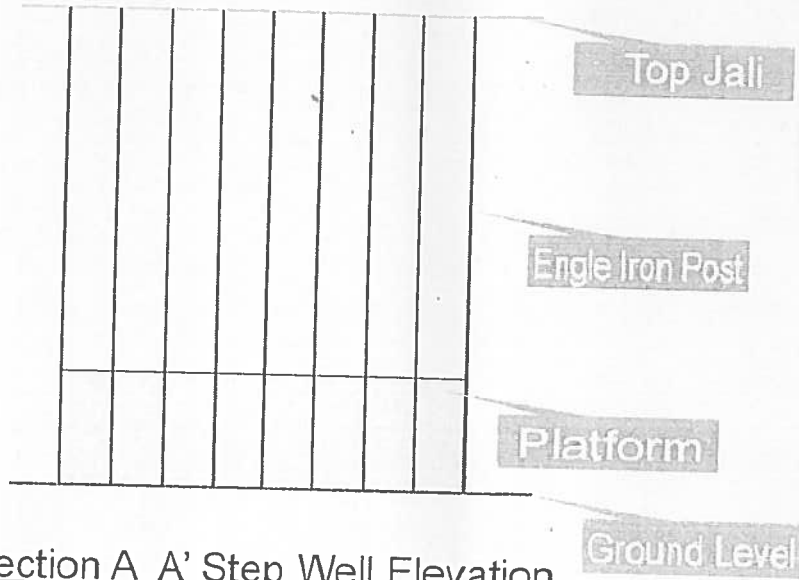

Section A A' Step Well Elevation

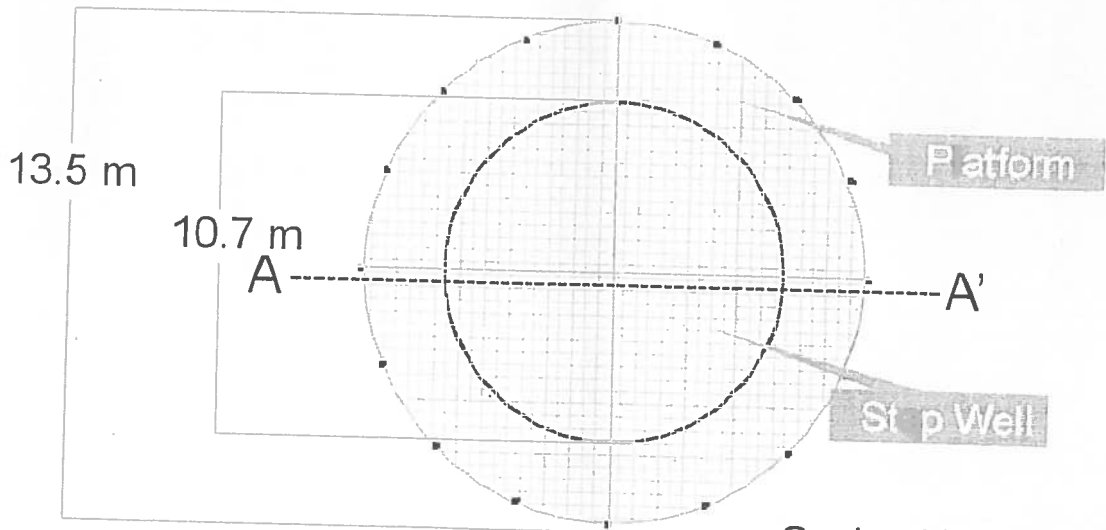


Scale - Not to be Scale

Step Well Plan


DETAILS ESTIMATE FOR PROVIDING AND FIXING OF WELDED STEEL WIRE
FABRIC FENCING SHED ON STEP WELL AT AWADHAPURA TEHSEEL RAJNAGAR
DIST. CHHATARPUR M.P.

Sr.No	Particular of item	QUANTITY	RATE	UNIT	AMOUNT
	Supplying at site Angle iron post & strut of required size including bottom to be split and bent at right angle in opposite direction for 10 cm length and drilling holes upto 10 mm dia. etc. complete. $22/7 * 13.7 = 43.05M$ $16 * 3.6 = 57.60M$ $2 * 13.7 = 27.40M$. 128.05M @ 3.5KG PER RM= 448.175				
	Providing and fixing G.I. chain link fabric fencing of required width in mesh size 25x25 mm made of G.I. wire of dia. 3mm including strengthening with 3mm dia. wire or nuts, bolts and washers as required complete as per the direction of Engineer-incharge. $1 * 22/7 * 4 * (13.7)^2 = 147.47$				
				TOTAL	
	ADD 3% FOR CONTEGENCIES CHARGES				
				G TOTAL	

Plan and Elevation of step well at Peera, Tahsil- Rajnagar, Dist- Chhatarpur, MP

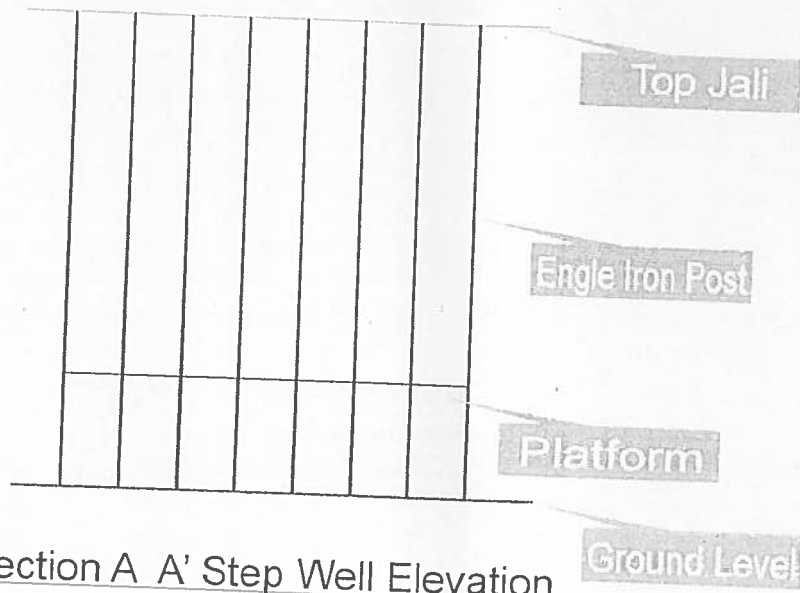

Section A A' Step Well Elevation

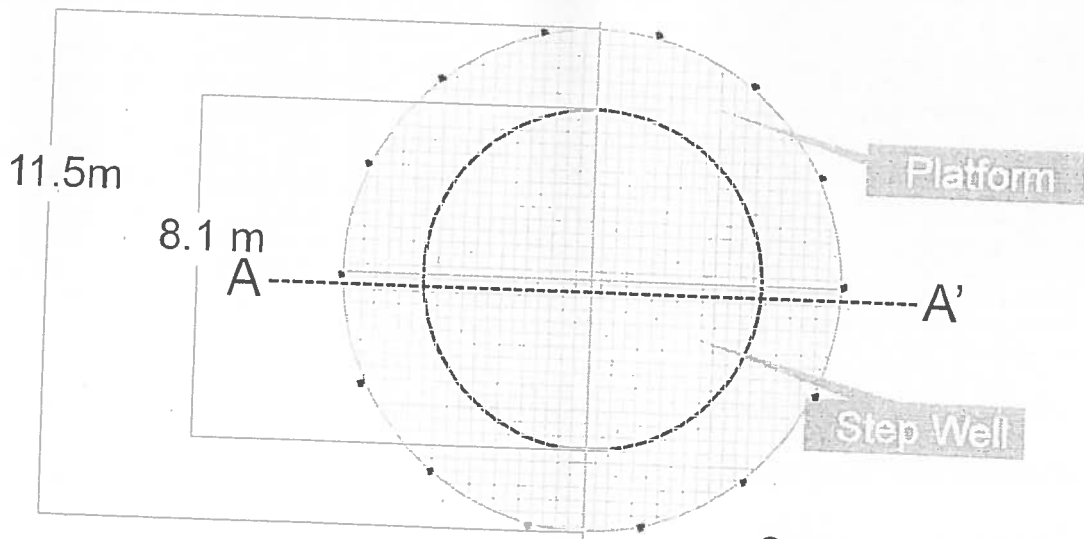

Scale - Not to be Scale

Step Well Plan


DETAILS ESTIMATE FOR PROVIDING AND FIXING OF WELDED STEEL WIRE
FABRIC FENCING SHED ON STEP WELL AT PEERA TEHSEEL RAJNAGAR
DIST. CHHATARPUR M.P.

Sr.No	Particular of item	QUANTITY	RATE	UNIT	AMOUNT
	<p>Supplying at site Angle iron post & strut of required size including bottom to be split and bent at right angle in opposite direction for 10 cm length and drilling holes upto 10 mm dia. etc. complete. 22/7</p> <p>*11.7 = 36.77M 14*3.6 = 50.40M 2* 11.7= 23.40M . 110.57M @ 3.5KG PER RM= 386.995</p>				
	<p>Providing and fixing G.I. chain link fabric fencing of required width in mesh size 25x25 mm made of G.I. wire of dia. 3mm including strengthening with 3mm dia. wire or nuts, bolts and washers as required complete as per the direction of Engineer-incharge. 22/7*4 *(11.7)2 = 107.57</p>				
				TOTAL	
	ADD 3% FOR CONTENGENCIES CHARGES				
				G TOTAL	


RS 76000.00

2D

Plan and Elevation of step well at Tikari, Tahsil- Rajnagar, Dist- Chhatarpur, MP

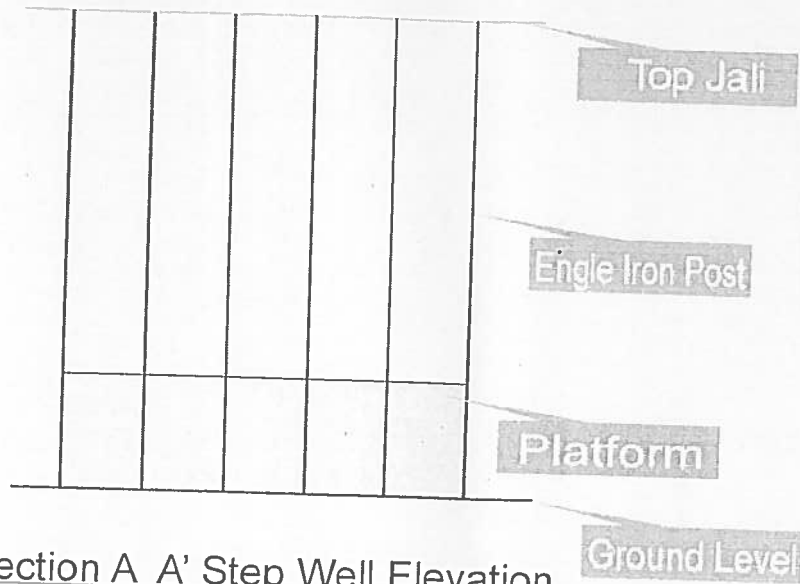

Section A A' Step Well Elevation

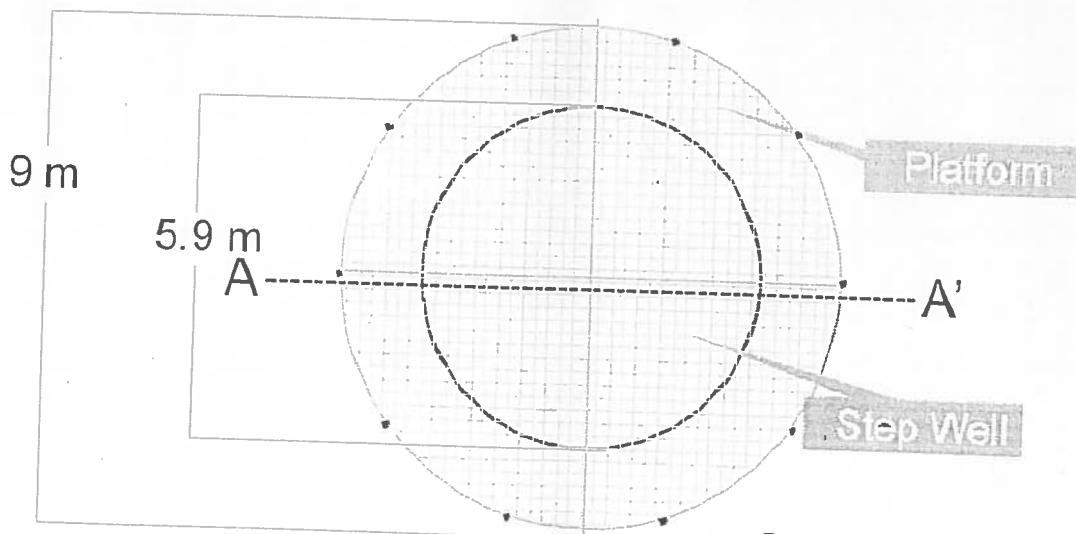

Scale - Not to be Scale

Step Well Plan

1 E

DETAILS ESTIMATE FOR PROVIDING AND FIXING OF WELDED STEEL WIRE
FABRIC FENCING SHED ON STEP WELL AT TIKARI TEHSEEL RAJNAGAR
DIST. CHHATARPUR M.P.

Sr.No	Particular of item	QUANTITY	RATE	UNIT	AMOUNT
	Supplying at site Angle iron post & strut of required size including bottom to be split and bent at right angle in opposite direction for 10 cm length and drilling holes upto 10 mm dia. etc. complete. 22/7 $*9.2 = 28.91M$ 16*3.6 $= 36.00M$ 2*9.2= <u>18.40M</u> 83.31M @ 3.5KG PER RM= 291.585				
	Providing and fixing G.I. chain link fabric fencing of required width in mesh size 25x25 mm made of G.I. wire of dia. 3mm including strengthening with 3mm dia. wire or nuts, bolts and washers as required complete as per the direction of Engineer-incharge. 22/7*4 $*(9.2)2 = 66.50$				
				TOTAL	
	ADD 3% FOR CONTENGENCIES CHARGES				
				G TOTAL	

2 E